



## MK - RC3

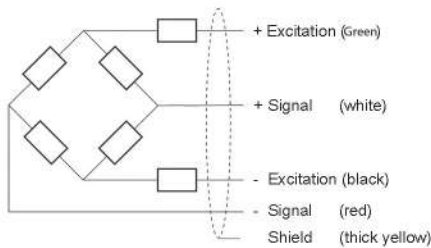

### FEATURE:

- Hexagonal stopper
- Upper and lower inhibitors design, easy to installation
- Dynamic respond, and super capacity for anti-overload
- Application to truck scale, railway scale, axle scale, storage scale and other weighing equipment

### Dimensions (in mm)

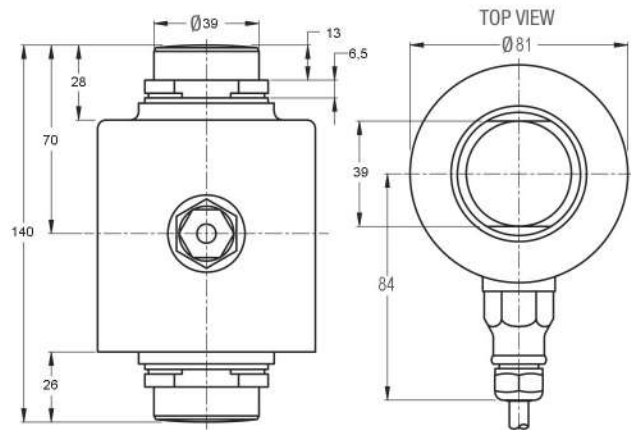

### SPECIFICATION

Rated capacities (E <sub>max</sub> )	30t	Temperature, compensated	-10°C~+40°C
Rated Output	2.0±0.001mV/V	Temperature, operating	-30~+70°C
Accuracy class	C3	Maximum safe overload	150%F.S
Creep error (30 min)	±0.02%F.S	Ultimate overload	250%F.S
Zero balance	±1%F.S	Excitation, recommended	10~12V DC
TC ZERO	±0.02%F.S/10°C	Excitation, maximum	15V DC
TC SPAN	±0.02%F.S/10°C	Protection class	IP68
Input resistance	1150±50Ω	Construction	Stainless Steel
Output resistance	1000±2Ω	Cable	Length: 14m
Insulation resistance	≥5000MΩ		Diameter: Φ 6mm