



MK - ALP

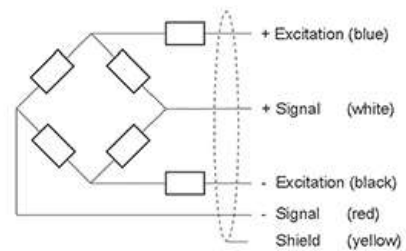


FEATURE:

- Unique design and customized design depend for user application
- High quality nickel plated steel
- 5 core high quality orange cable
- Mostly use for shipyard, crane, high building, and testing machine

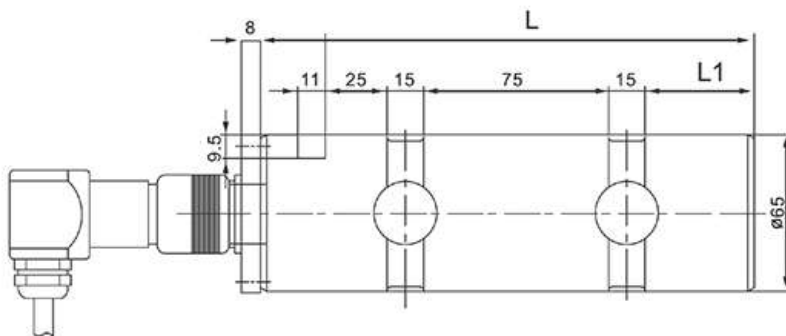

Capacity(t)	L	L1
15	186	30
7,10,20	200	44



SPECIFICATION

Rated capacities (E _{max})	7, 10, 15, 20t	Temperature, compensated	-10°C~+40°C
Rated Output	1.0±0.01mV/V	Temperature, operating	-30~+70°C
Total error	±0.5%F.S	Maximum safe overload	150%F.S
Creep error (30 min)	±0.1%F.S	Ultimate overload	200%F.S
Zero balance	±1%F.S	Excitation, recommended	10~12V DC
TC ZERO	±0.03%F.S/10°C	Excitation, maximum	15V DC
TC SPAN	±0.03%F.S/10°C	Protection class	IP67
Input resistance	760±10Ω	Construction	Nickel Plated Steel
Output resistance	702±3Ω	Cable	Length:12m
Insulation resistance	≥5000MΩ		Diameter: Φ 5mm