


MK - SP16




FEATURE:

- High quality single point load cell
- Aluminium Alloy Material
- Protection Class IP65
- Recommended Platform Use (cm) : 45 x 45
- Polyethylene 4 core high quality orange cable with shield (type 4530)

DIMENSION

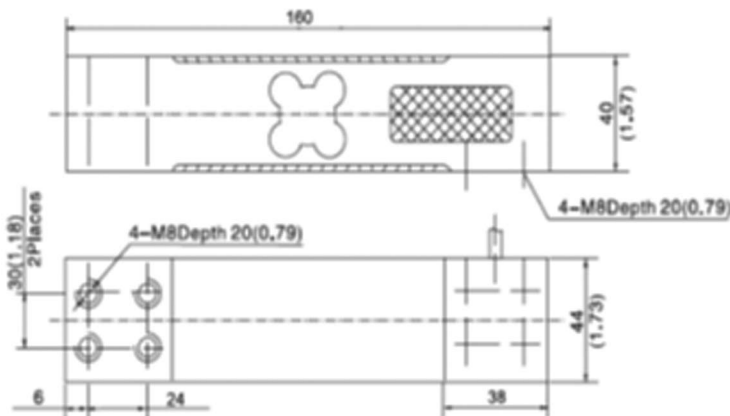

ELECTRICAL CONNECTIONS

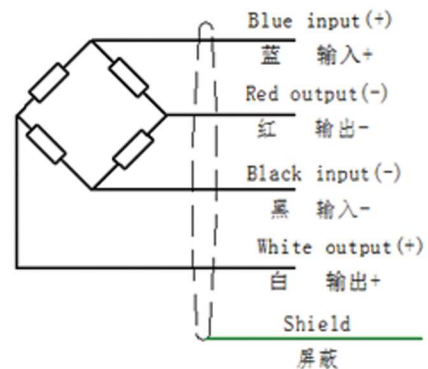

SPECIFICATION

Max Capacity (E _{max}) (kg)	50, 100, 150, 200, 300, 350
Output Sensitivity	2.0 ± 0.2 mv/v
Accuracy Class	0.02
Operating Temperature	-20~+50°C
Zero balance	2 %FS
TC ZERO	0.05 %FS/10°C
TC SPAN	0.05 %FS/10°C
Input resistance	406±6 Ω
Output resistance	350±3 Ω
Insulation resistance	≥5000 MΩ